




PW-C SERIES (ETFE-Lined Metal Housing)
Heavy Duty Magnetic-Drive Pumps

- ETFE-Lined pumps in cast iron exterior and Hastelloy-C Rear Casing reinforcement.
- Handles practically most chemicals and up to temperature of 90°C.
- Bearing Material: HD Carbon, Ceramic or Silicone Carbide
- Spindle Material: Ceramic or Silicone Carbide
- Thrust Pad: Ceramic or Silicone Carbide
- O-Ring: Special Compounded FKM
- Impeller Type: Closed
- Connections: Flange

PW-C Series - Part List

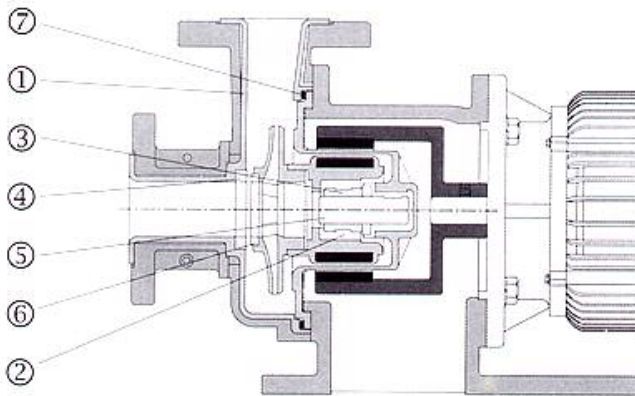


Part Name	PW-C SERIES			
	FV	RV	AV	SI
1. Casing	Carbon Fibre Reinforced Tetra Fluorethylene (ETFE)			
2. Holder				
3. Bearing	HD Carbon	PTFE Based	Ceramic	SiC Ceramic
4. Thrust Ring	High Purity Ceramic			
5. Spindle				
6. Mouth Ring	PTFE Based			
7. O-Ring	Special Compounded FKM			
8. Cover	Cast Iron			

Specifications & Performance Curve


Pump Model	Connection Inlet x Outlet (mm)	Specific Point Lit/Min - M	Motor Output (kw)	Approx Weight (kg)
250 PW-C	25X25	135-7.0	0.37	35
401 PW-C	40X40	200-9.3	0.75	40
402 PW-C	50X40	260-16	1.5	50
403 PW-C	50X40	320-18	2.2	54
405 PW-C	50X40	380-25	3.7	67
505 PW-C	65X50	550-16.7	3.7	80
507 PW-C	65X50	550-25.7	5.5	104
657 PW-C	80X50	800-19.2	5.5	130
6510PW-C	80X50	950-24.7	7.5	138
6515PW-C	80X50	1100-32	11	153

NOTE: Performance data based on SG 1.2

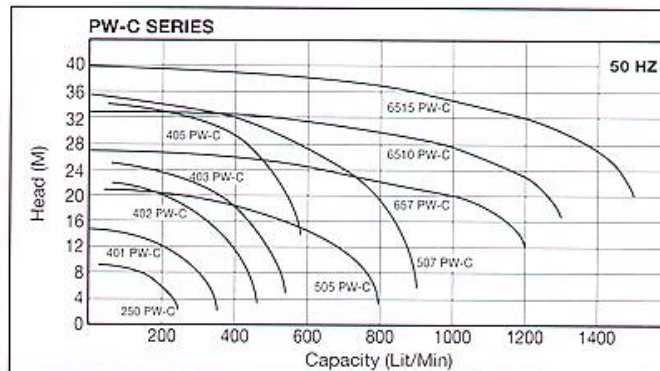

For more information, please email sales@panworld.com.sg

Installation Dimension: PW-C Series

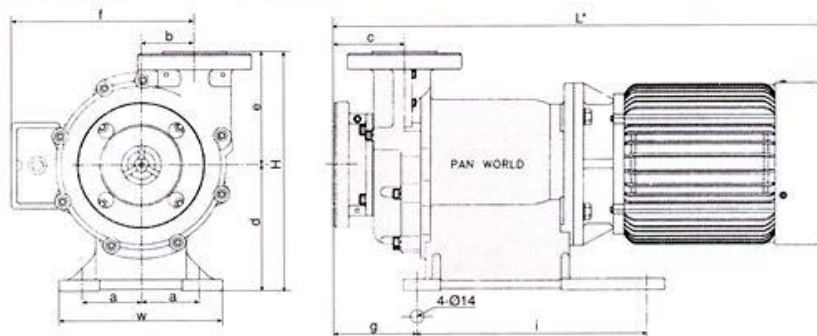

Pump Model	W	H	L*	a	b	c	d	e	f	g	i
250PW-C	155	237	490	55	51	88	115	122	147	95	146
401PW-C	195	275	529	65	58	105	135	140	152	111	250
402PW-C	200	295	603	70	65	87	155	140	166	106	275
403PW-C	200	295	603	70	65	87	155	140	166	106	275
405PW-C	200	295	676	70	65	87	155	140	188	106	275
505PW-C	260	325	720	105	62	110	175	150	188	130	305
507PW-C	260	325	786	105	62	110	175	150	261	130	305
657PW-C	280	360	798	110	63	118	175	150	261	192	320
6510PW-C	280	360	798	110	63	118	175	185	261	192	320
6515PW-C	280	360	984	110	63	118	175	185	281	192	320

NOTE: *Depending on types and power of motor to be fitted.

For more information, please email sales@panworld.com.sg